



RAK7240V2/RAK7240CV2 WisGate Edge Prime Datasheet

Overview

Description

The RAK7240V2 WisGate Edge Prime is ideal for large-scale LPWAN deployments where cost is essential, without compromising quality. The gateway is available in 8 or 16-channel versions to help you utilize the maximum number of available LoRaWAN channels in your region. It supports multi-backhaul with Ethernet, Wi-Fi, and cellular connectivity.

In addition, RAK7240V2 operates under [WisGateOS 2](#) , which is built on the latest OpenWrt kernel. The OS Web UI features a new design and supports multiple extension installations, enabling remote management using [WisDM](#)  for personalized gateway customization.

Its wide range of customization options allows for flexibility when deploying a solution. It is suited for any use-case scenario, whether it's rapid deployment or customization regarding UI and functionality. The flat surface of the full-metal enclosure allows your logo to be added for brand customization and recognition.



NOTE

The cellular option is only available for the 8-channel LoRaWAN gateway.




Features

Hardware

- IP65 industrial-grade enclosure with cable glands
- PoE (802.3af) + Surge Protection
- Up to two (2) LoRa concentrators for 8 or 16-channel options
- Backhaul: Wi-Fi, Ethernet, and LTE (optional, available with RAK7240CV2)
- GPS

- Supports 9~24 V_{DC} and RAK Solar Battery Kit (available for gateways with DC Input interface)
- External antennas for Wi-Fi, GPS, LTE (optional, available with RAK7240CV2), and LoRa

Software

- [WisGateOS 2](#) 
- [WisGateOS 2 Extensions](#)  : OpenVPN, Wireguard VPN, and others
- Remote management with [WisDM](#)  Fleet Management
- Built-in Network Server (LoRaWAN support v1.0.3)
- LoRaWAN Stack support with Semtech SX1303
- LoRa Frame filtering (node whitelisting in Packet Forwarder mode)
- MQTT v3.1 bridging with TLS encryption
- Fine timestamping (optional)
- Buffering of LoRa frames in Packet Forwarder mode in case of NS outage (no data loss)

Specifications

Overview

Block Diagram

The block diagram of RAK7240V2/RAK7240CV2 shows the internal architecture of the hardware.

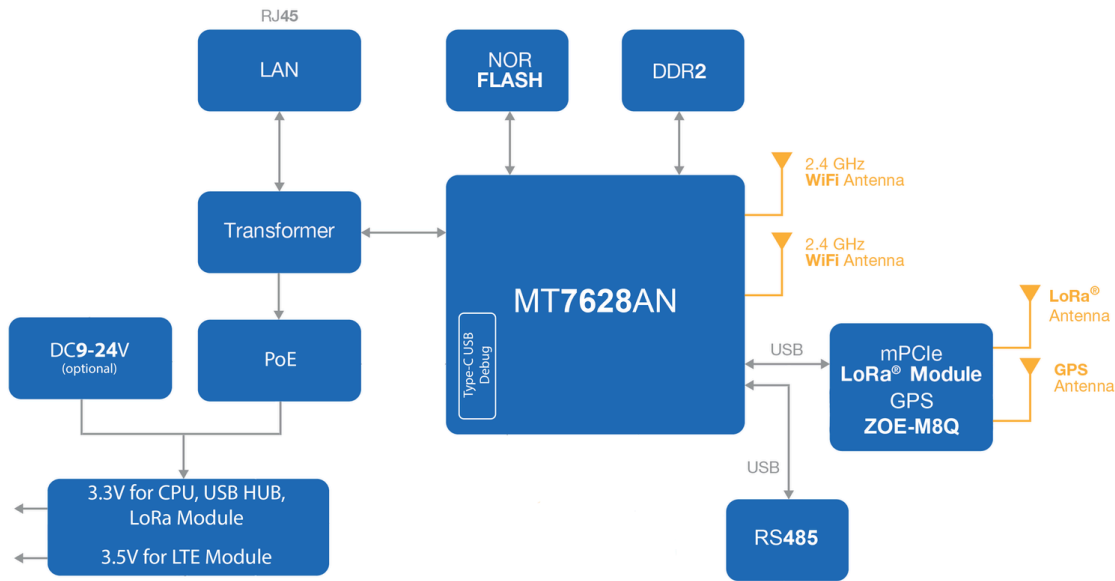


Figure 1: RAK7240V2 Block Diagram

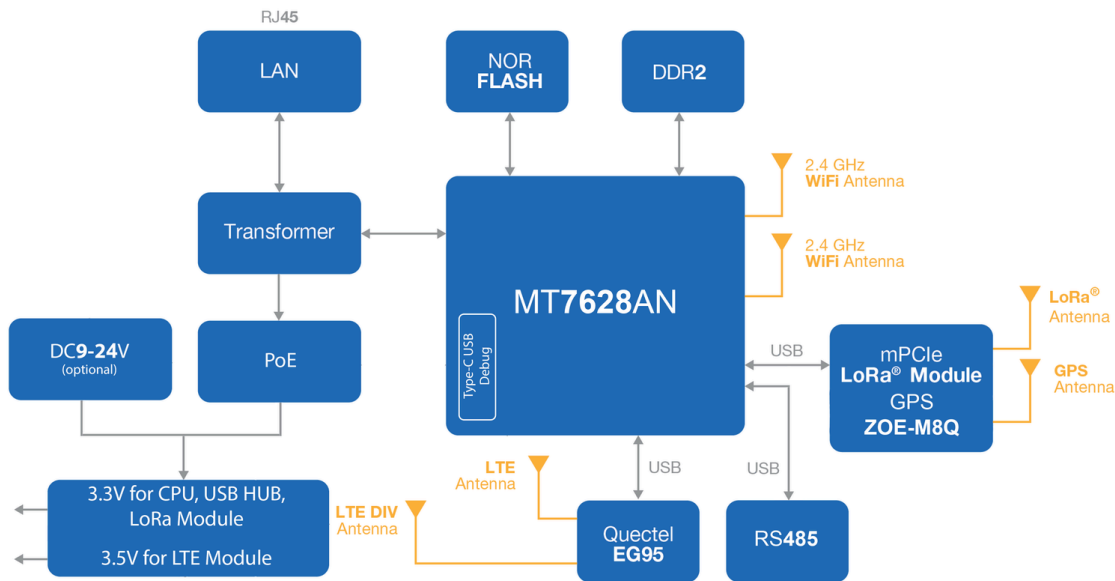


Figure 2: RAK7240CV2 Block Diagram

Main Specifications

| Feature | Specifications |
|-----------|------------------------|
| Computing | MT7628, DDR2RAM 128 MB |

| Feature | Specifications |
|--|--|
| Wi-Fi Feature | <p>Frequency: 2.400-2.4835 GHz (802.11b / g / n)</p> <p>RX Sensitivity: -95 dBm (Min)</p> <p>TX Power: 20 dBm (Max)</p> <p>Operation Channels: 2.4 GHz: 1-13</p> |
| LoRa Feature | <p>SX1303 mPCIe card (connects a maximum of two)</p> <p>8 Channels (16 channels optional)</p> <p>RX Sensitivity: -139 dBm (Min)</p> <p>TX Power: 27 dBm (Max)</p> <p>Frequency:</p> <ul style="list-style-type: none"> • EU868 • IN865 • RU864 • US915 • AU915 • KR920 • AS923-1/2/3/4 • EU433 • CN470 |
| Cellular Feature (available with RAK7240CV2, 8-channel option) | <p>Nano SIM Card: 12.30 mm x 8.80 mm x 0.67 mm</p> <p>Supports Quectel EG95-E / EG95-NA (IoT / M2M -optimized LTE Cat 4 Module)</p> <p>EG95-E for EMEA Region</p> <p>LTE FDD: B1 / B3 / B7 / B8 / B20 / B28A</p> <p>WCDMA: B1 / B8</p> <p>GSM: 900 / 1800 MHz</p> <p>EG95-NA for North America Region</p> <p>LTE FDD: B2 / B4 / B5 / B12 / B13</p> <p>WCDMA: B2 / B4 / B5</p> |
| Power Supply | <p>PoE (IEEE 802.3af) , 42 ~ 57 V_{DC}</p> <p>9 ~ 24 V_{DC} from dedicated DC port (optional)</p> |

| Feature | Specifications |
|-----------------------|--|
| | Compatible with RAK Solar Battery Kit (optional) |
| Power Consumption | 12 W (typical) |
| Ethernet (ETH) | RJ45 (10/100M) |
| Console | RJ45 (RS232) |
| Antenna | LoRa: N-Type connector (one for the 8-channel gateway and two for the 16-channel gateway) GPS: One N-Type connector Wi-Fi: two N-Type connectors LTE: Two N-Type connectors (only for RAK7240CV2, 8-channel option) |
| Ingress Protection | IP65 |
| Enclosure Material | Aluminum |
| Weight | 1.3 kg |
| Dimension | 224 mm x 121 mm x 42 mm Gateway only (no antenna, no bracket) |
| Operating Temperature | -30° C to + 55° C |
| Storage Temperature | -40° C to + 85° C |
| Operating Humidity | 0% to 95% (non-condensing) |
| Storage Humidity | 0% to 95% (non-condensing) |
| Installation Method | Pole or wall mounting |

Hardware

The hardware specification is categorized into four sections. It discusses the interfaces and parameters of the RAK7240V2/RAK7240CV2. It also covers the LoRa and Wi-Fi specifications of the board.

Interfaces



Figure 3: RAK7240V2/RAK7240CV2 Interfaces

The SD card in the SD card slot must not be ejected, as it may affect the device's performance, as various logs and data are stored on it.

The antenna ports are not all open; it depends on the bundle you purchased. For example, if you purchased an 8-channel gateway without cellular connectivity, the LTE antenna ports will be sealed.

The DC Input port is available only for the RAK7240V2/RAK7240V2CV2 version with DC and Battery Plus support. This power port supports a range of 9~24 V_{DC}. It is designed to be compatible with the RAK Battery Plus, providing the device with an additional power source.



NOTE

The DC Input port is only available if selected during your purchase.

Reset Key Functions

The functions of the Reset key are as follows:

- **Short press:** Restart the gateway.
- **Long press (5 seconds and above):** Restore factory settings.

LED Indicators

The status of the LEDs is described below. Refer to the LED printing on the main board.

| LEDs | Status Indication Description |
|----------------------------|---|
| PWR | Power indicator: The LED is on when device power is on |
| ETH | ON: Link is up OFF: Link is down Flicker: Data is being transferred |
| LoRa | ON: LoRa module 1 status is up OFF: LoRa module 1 status is down Flicker: LoRa module 1 data is being transferred |
| ACT (LTE) | Slow flicker (200 ms bright / 1800 ms dark): Searching for network Slow flicker (200 ms dark / 1800 ms bright): Idle status (online) Fast flicker: Data is being transferred |
| STAT (16 channels only) | ON: LoRa module 2 status is up OFF: LoRa module 2 status is down Flashing: LoRa module 2 data is being transferred |
| WLAN | AP Mode <ul style="list-style-type: none"> ON: WLAN status is up Flicker: Data is being transferred STA Mode <ul style="list-style-type: none"> Slow flicker (1 Hz): Disconnected ON: Connected Flicker: Data is being transferred |

RF Specifications

LoRa Radio Specifications

| Feature | Specifications |
|---------------------|--|
| Operating frequency | <ul style="list-style-type: none"> EU868 IN865 |

| Feature | Specifications |
|----------------------|---|
| | <ul style="list-style-type: none">• RU864• US915• AU915• KR920• AS923-1/2/3/4• EU433• CN470 |
| Transmit power | 27 dBm (Max) |
| Receiver sensitivity | -139 dBm (Min) |


Wi-Fi Radio Specifications

| Feature | Specifications |
|--|---|
| Wireless Standard | IEEE 802.11b / g / n |
| Operating frequency | ISM band: 2.412~2.472 (GHz) |
| Operation channels | 2.4 GHz: 1-13 |
| Transmit power: per chain (The max. power may be different depending on local regulations) | 802.11b 1 Mbps: 19 dBm 11 Mbps: 19 dBm 802.11g 6 Mbps: 18 dBm 54 Mbps: 16 dBm 802.11n (2.4 GHz) MCS0 (HT20): 18 dBm MCS7 (HT20): 16 dBm MCS0 (HT40): 17 dBm MCS7 (HT40): 15dBm |

| Feature | Specifications |
|--------------------------------|--|
| Receiver sensitivity (Typical) | 802.11b 1 Mbps: 95 dBm 11 Mbps: 88 dBm 802.11g 6 Mbps: 90 dBm 54 Mbps: 75 dBm 802.11n (2.4 GHz) MCS0 (HT20): 89 dBm MCS7 (HT20): 72 dBm MCS0 (HT40): 86 dBm MCS7 (HT40): 68 dBm |

Electrical Characteristics

The gateway supports multiple power supply options.

- **Power Cord + PoE Adapter:** The gateway is powered via PoE. PoE (IEEE 802.3af), 42~57 V_{DC} .
- **Cable for RAK Battery Plus:** Only available for gateways with DC Input interface. For outdoor deployment scenarios, it is recommended to use [RAK9155 Battery Plus](#)  as its power supply. This cable is dedicated to RAK9155 Battery Plus.

NOTE

RAK9155 Battery Plus is not included in the bundle, it needs to be purchased separately.

Mechanical Characteristics

| Parameter | Value |
|--------------------|---|
| Dimensions | 224 mm x 121 mm x 42 mm Gateway only (no antenna, no bracket) |
| Weight | 1.3 kg |
| Enclosure Material | Aluminum |

| Parameter | Value |
|--------------------|-------|
| Ingress protection | IP65 |

Environmental Requirements


| Parameter | Value |
|----------------------|--|
| Operating Conditions | Operating Temperature:-30° C to + 55° C Storage Temperature:-40° C to + 85° C Operating Humidity: 0 ~ 95% RH non-condensing Storage Humidity: 0 ~ 95% RH non-condensing |

Software

| LoRa | Network | Management |
|---|--------------------|-------------------------|
| Gateway OTA management | Wi-Fi AP mode | WisDM |
| LoRa package forward (packet forwarder, Basics Station) | Wi-Fi Client mode | SSH2, NTP |
| Frequency Band Setup | LTE APN Setup | Firmware update |
| Country code setup | 802.1q | LoRa Packet Forwarder |
| TX Power Setup | Uplink backup | Built-in Network Server |
| Data logger | Firewall | MQTT Bridge |
| Location setup | DHCP Server/Client | OpenVPN, Ping Watch Dog |
| Statistic | | WEB UI |
| Supports class A, B, and C | | |

| LoRa | Network | Management |
|-------------------------------|---------|------------|
| Server address and Port setup | | |

Firmware

| Model | Firmware Version | Source |
|---|------------------|--|
| RAK7240V2/RAK7240CV2 WisGate Edge Prime | v2.2.13 | Download  |

Models/Bundles

| Models | Variants | Packing list |
|-----------|--|--|
| RAK7240V2 | 8 Channels without 4G | 1 × 8-channel device 1 x GPS Antenna 1 × 2.4G WiFi Antenna 1 x PoE Injector 1 x Mounting Kit 1 x Manual |
| | 8 Channels without 4G DC and Battery Plus support | 1 × 8-channel device with DC Input interface 1 x GPS Antenna 1 × 2.4G WiFi Antenna 1 x PoE Injector 1 x Mounting Kit 1 x Cable for RAK Battery Plus 1 x Manual |
| RAK7240V2 | 16 Channels without 4G | 1 × 16-channel device 1 x GPS Antenna 1 × 2.4G WiFi Antenna 1 x PoE Injector 1 x Mounting Kit 1 x Manual |

| Models | Variants | Packing list |
|------------|---|--|
| | 16 Channels without 4G DC and Battery Plus support | 1 × 16-channel device with DC Input interface 1 x GPS Antenna 1 × 2.4G WiFi Antenna 1 x PoE Injector 1 x Mounting Kit 1 x Cable for RAK Battery Plus 1 x Manual |
| RAK7240CV2 | 8 Channels with 4G | 1 × 8-channel device with LTE module 2 x LTE Antenna 1 x GPS Antenna 1 × 2.4G WiFi Antenna 1 x PoE Injector 1 x Mounting Kit 1 x Manual |
| | 8 Channels with 4G DC and Battery Plus support | 1 × 8-channel device with LTE module and DC Input interface 2 x LTE Antenna 1 x GPS Antenna 1 × 2.4G WiFi Antenna 1 x PoE Injector 1 x Mounting Kit 1 x Cable for RAK Battery Plus 1 x Manual |

Certification



[Home](#)[« Previous](#)

LoRa® is a registered trademark or service mark of Semtech Corporation or its affiliates. LoRaWAN® is a licensed mark.



Copyright © 2014-2024 RAKwireless Technology Limited.

All rights reserved.

