

PRODUCT CATEGORIES

WISGATE

RAK7268

DATASHEET

# **RAK7268 WisGate Edge Lite 2 Datasheet**

### **Overview**

### **Description**

The RAK7268 WisGate Edge Lite 2 is a full 8-channel indoor gateway, based on the LoRaWAN protocol, with built-in Ethernet connectivity for a straightforward setup. There is an onboard Wi-Fi setup (supporting 2.4 GHz Wi-Fi) that allows it to be easily configured via the default Wi-Fi AP mode. Additionally, the gateway supports LTE uplink communication connections (optional).

As with the other RAKwireless Industrial Gateways, it also supports MQTT Bridge mode, with the option for TLS authentication.

Power-over-Ethernet (PoE) is supported to serve cases where wall or ceiling mounting is required without the need to install additional power lines.

The open-source software for the management and configuration of this gateway device is based on OpenWRT. It has a built-in LoRa packet forwarder and a graphical user interface, allowing for a quick setup without giving up the freedom of a fully customized solution.

RAK7268 also supports the MQTT Bridge function, can use the MQTT integrated to third-party platforms.

RAK7268 is especially suitable for small and medium-sized deployment scenarios in industry applications, saving the additional cost for server and R&D investment, and has the advantages of high execution efficiency.

#### **Features**

- Full LoRaWAN Stack support (V 1.0.3) with Semtech SX1302
- Supports 2.4 GHz Wi-Fi AP for configuration
- 100M Base-T Ethernet with PoE
- Multi back-haul with Ethernet, Wi-Fi, Cellular
- OpenWRT software supports Web UI for easy configuration and monitoring
- Can integrate with both private (ChirpStack) and public (TTN) network servers

- TF card for log backup and LoRa frame buffering (in case of backhaul failover)
- Built-in Network Server for easy deployment of applications and integration of gateways
- LTE Cat 4 network (optional)

# **Specifications**

### **Overview**

The overview presents the block diagram for the RAK7268 that shows the internal architecture of the board.

### **Block Diagram**

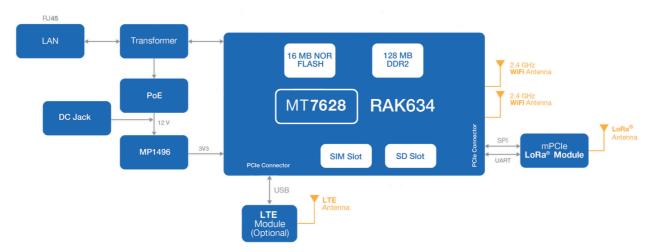


Figure 1: WisGate Edge Lite 2 Block Diagram

#### **Hardware**

The hardware specification covers only the interfacing of the RAK7268 and its corresponding functionalities. It also presents the parameters and the standard values of the board.

#### **Interfaces**

The hardware interfaces of RAK7268 gateway include DC 12 V, ETH interface, Console interface, Reset key, TF Card slot, Status indicator LEDs, LoRa Antenna connector, etc.



Figure 2: WisGate Edge Lite 2 Interfaces

### **Reset Key Functions**

The function of the Reset key is as follows:

- Short press: Restart the gateway.
- Long press (5 sec and above): Restore factory settings.

#### **LED Indicators**

LEDs	Status Indication Description
PWR LED	Power indicator - The LED is on when device power is on
Breathing LED	Breathing after system up
ETH LED	ON - Linkup
	OFF - Linkdown
	Flicker - Data transmitting and receiving
LoRa LED	ON - LoRa is working

LEDs	Status Indication Description
	OFF - LoRa is not working
	Flicker - Indicate LoRa Packet receiving and sending
	AP Mode:
	-ON - The AP is up
WLAN LED	-OFF - The AP is down
	-Flicker - Data receiving and sending
	STA Mode:
	-Slow flicker (1 Hz) - Disconnected
	-ON - Connected
	-Flicker - Data receiving and sending
	Slow Flicker (1800 ms High / 200 ms Low) - Network searching
LTE LED	Slow flicker (200 ms High / 1800 ms Low) - Idle
	Fast flicker (125 ms High / 125 ms Low) - Ongoing data transfer

# **Main Specifications**

Feature	Specifications
Computing	MT7628, DDR2 RAM 128 MB
Wi-Fi feature	Frequency: 2.4 GHz (802.11b/g/n)
	RX Sensitivity: -95 dBm (Min)
	TX Power: 20 dBm (Max)

Feature	Specifications	
	Operation channels: 2.4 GHz: 1-13	
LoRa feature	SX1302 Mini PCle card	
	8 Channels	
	RX Sensitivity: -139 dBm (Min)	
	TX Power: 27 dBm (Max)	
	Frequency: EU433/CN470/EU868/US915/AS923/AU915/IN865/KR920	
	Supports Quectel EG95-E/EG95-NA (IoT/M2M -optimized LTE Cat 4 Module)	
	EG95-E for EMEA Region	
	- LTE FDD: B1/B3/B7/B8/B20/B28A	
	- WCDMA: B1/B8	
Cellular	- GSM/EDGE: B3/B8	
	EG95-NA for North America Region	
	- LTE FDD: B2/B4/B5/B12/B13	
	- WCDMA: B2/B4/B5	
	Optional supports other PCIe LTE module for Global Region	
Dower aupply	DC 12 V - 1 A	
Power supply	PoE (IEEE 802.3 af), 36~57 V <sub>DC</sub>	

Feature	Specifications	
Power consumption	12 W (typical)	
ETH	RJ45 (10/100 M)	
Console	Type-C USB	
	LoRa: RP-SMA female connector	
Antenna	LTE: Internal antenna	
	Wi-Fi: Internal antenna	
	POWER LED	
	Breathing LED (Top side)	
LEDs	ETH LED (On ETH connector)	
LEDS	LoRa LED	
	WLAN LED	
	LTE LED	
Ingress protection	IP30	
Enclosure material	Plastic	
Weight	0.3 kg	
Dimension	166×127×36 mm	
Operating temperature	-10 to 55 °C	

Feature	Specifications
Installation method	Wall mounting

# **RF Specifications**

# **Wi-Fi Radio Specifications**

Feature	Specifications	
Wireless Standard	IEEE 802.11b/g/n	
Operating Frequency	ISM band: 2.412~2.472 GHz	
Operation Channels	2.4 GHz: 1-13	
	802.11b	
	19 dBm @1 Mbps	
	19 dBm @11 Mbps	
	802.11g	
Transmit Dayyar	18 dBm @6 Mbps	
Transmit Power  (The max power maybe different depending on local regulations) - per chain	16 dBm @54 Mbps	
	802.11n (2.4G)	
	18 dBm @MCS0 (HT20)	
	16 dBm @MCS7 (HT20)	
	17 dBm @MCS0 (HT40)	
	15 dBm @MCS7 (HT40)	

Feature	Specifications
	802.11b
	-95 dBm @1 Mbps
	-88 dBm @11 Mbps
	802.11g
	-90 dBm @6 Mbps
Receiver Sensitivity (Typical)	-75 dBm @54 Mbps
	802.11n (2.4G)
	-89 dBm @MCS0 (HT20)
	-72 dBm @MCS7 (HT20)
	-86 dBm @MCS0 (HT40)
	-68 dBm @MCS7 (HT40)

### **LoRa Radio Specifications**

Feature	Specifications
Operating Frequency	EU433/CN470/EU868/US915/AS923/AU915/IN865/KR920
Transmit Power	27 dBm (Max)
Receiver Sensitivity	-139 dBm (Min)

# **LTE Radio Specifications**

Feature	Specification
EG95-E for EMEA Region	LTE FDD: B1/B3/B7/B8/B20/B28A WCDMA: B1/B8 GSM/EDGE: B3/B8
EG95-NA for North America Region	LTE FDD: B2/B4/B5/B12/B13 WCDMA: B2/B4/B5 Optional supports other PCIE LTE module for Global Region

### **Electrical Requirements**

The Gateway comes with a 12 V-1 A power adaptor. It is also fully compatible with PoE (IEEE 802.3af),  $36\sim57$  V<sub>DC</sub>.

The typical power consumption is 12 W.

### **Environmental Requirements**

The casing is IP30 rated and is made of plastic. There are holes for a mounting bracket on the back, in order to simplify wall mounting. The enclosure, while robust, is not meant for outdoor deployment and should be kept away from moisture.

Parameter	Value	
Dimensions	66×127×36 mm	
Weight	0.3 kg	
Operating temperature	-10 to 55 °C	

#### **Firmware**

The firmware sits on OpenWRT, which makes it possible to customize it. There is a Web UI for easy configuration and management of the device, as well as the possibility for SSH2 management.

Model	Firmware Version	Source
RAK7268 WisGate Edge Lite 2	WisGateOS V1.3.9	Download ☐

### **Software**

#### **Software Features**

LoRaWAN	Network	Management
Supports class A, C	Wi-Fi AP mode	WEB management
LoRa package forward	Uplink backup	SSH2
Country code setup	802.1q	Firmware update
TX Power setup	DHCP Server/Client	NTP
Data logger	Router module NAT	Configuring the LoRa Packet Forwarder
Statistics	Firewall	Build-in Server
Location setup	LTE APN setup	OpenVPN, Ping Watch Dog
Server address and Port setup		MQTT Bridge

### **FCC Caution**

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.



This equipment has been tested and found to comply with the limits for a Class B digital device, according to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used following the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- 1. Reorient or relocate the receiving antenna.
- 2. Increase the separation between the equipment and receiver.
- 3. Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- 4. Consult the dealer or an experienced radio/TV technician for help.

### **FCC Radiation Exposure Statement**

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20 cm between the radiator and your body.

# **ISEDC Warning**

This device complies with Innovation, Science, and Economic Development Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions:

- 1. This device may not cause interference;
- 2. This device must accept any interference, including interference that may cause undesired operation of the device.


Le présent appareil est conforme aux CNR d' Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

1. l'appareil nedoit pas produire de brouillage, et

2. l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

The device complies with RF exposure guidelines, users can obtain Canadian information on RF exposure and compliance. The minimum distance from the body to use the device is 20 cm.

Le présent appareil est conforme Après examen de ce matériel aux conformité ou aux limites d'intensité de champ RF, les utilisateurs peuvent sur l'exposition aux radiofréquences et la conformité and compliance d'acquérir les informations correspondantes. La distance minimale du corps à utiliser le dispositif est de 20 cm.





LoRa® is a registered trademark or service mark of Semtech Corporation or its affiliates. LoRaWAN® is a licensed mark.



Copyright © 2014-2024 RAKwireless Technology Limited.

All rights reserved.

