
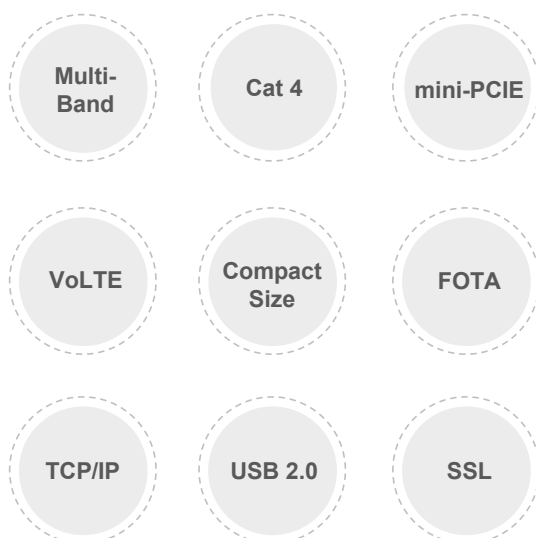


SIM7600-H-PCIE Series

SIMCom LTE Cat 4 Module

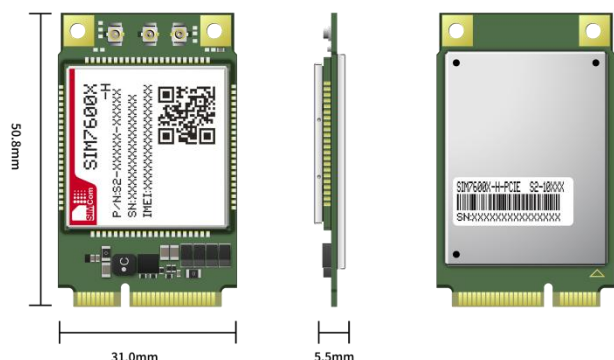

Product Description

The SIM7600-H-PCIE series is the LTE Cat 4 module which supports wireless communication modes of LTE-TDD/LTE-FDD/HSPA+/GSM/GPRS/EDGE etc. It supports maximum 150Mbps downlink rate and 50Mbps uplink rate.

The SIM7600-H-PCIE series adopts mini PCIE form factor and consists of a SIM7600-H series module and a mini PCIE adapter board. It is easy for customers to integrate.

The SIM7600-H-PCIE series integrates multiple satellite high accuracy positioning GNSS systems, with multiple built-in network protocols, supports drivers for main operation systems (USB driver for Windows, Linux and Android etc.) and software function, AT commands are compatible with SIM7500/SIM7600 series modules. Meanwhile the SIM7600-H-PCIE series integrates main industrial standard interfaces, with powerful expansibility, including abundant interfaces such as UART, USB, GPIO, which is suitable for main IoT applications such as telematics, surveillance devices, CPE, industrial routers, and remote diagnostics etc.

Key Benefits

- ◆ Mini-PCIE interface with strong compatibility
- ◆ Suitable for LTE, UMTS and GSM networks with global coverage
- ◆ Abundant software functions: FOTA, LBS, TLS, VoLTE
- ◆ Multi-constellation GNSS receiver support
- ◆ AT commands of the SIM7600-H-PCIE series are compatible with the SIM7500/SIM7600 series modules

Product		SIM7600A-H-PCIE	SIM7600V-H-PCIE	SIM7600SA-H-PCIE	SIM7600JC-H-PCIE
Form Factor		Mini PCIE	Mini PCIE	Mini PCIE	Mini PCIE
Dimensions(mm)		50.8*31*5.35	50.8*31*5.35	50.8*31*5.35	50.8*31*5.35
Frequency Bands	LTE-FDD	B2/B4/B12	B2/B4/B5/B13	B1/B2/B3/B4/B5/B7/B8/B28/B66	B1/B3/B8/B18/B19/B26
	LTE-TDD			B40	
	WCDMA	B2/B5		B1/B2/B5/B8	
	GSM			850/900/1800/1900MHz	
GNSS		o	o	o	o
Temperature		-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C
Electrical Features					
Supply Voltage(V)		3.0~ 3.6	3.0~ 3.6	3.0~ 3.6	3.0~ 3.6
Power Consumption (mA)	LTE	2.3	2.3	2.3	2.3
	WCDMA, DRX=9	3.3		3.3	
	GSM,BS_PA_MFRMS=2			2.8	
Data Transfer					
LTE(Mbps)		150(DL)/50(UL)	150(DL)/50(UL)	150(DL)/50(UL)	150(DL)/50(UL)
HSPA+(Mbps)		42(DL)/5.76(UL)		42(DL)/5.76(UL)	
WCDMA(Kbps)		384(DL)/384(UL)		384(DL)/384(UL)	
GPRS/EDGE(Kbps)				236.8(DL)/236.8(UL)	
Software Features					
Protocol		TCP/IP/IPV4/IPV6/ Multi-PDP/FTP/FTPS/HTTP/ HTTPS/DNS	TCP/IP/IPV4/IPV6/ Multi-PDP/FTP/FTPS/HTTP/ HTTPS/DNS	TCP/IP/IPV4/IPV6/ Multi-PDP/FTP/FTPS/HTTP/ HTTPS/DNS	TCP/IP/IPV4/IPV6/ Multi-PDP/FTP/FTPS/ HTTP/ HTTPS/DNS
TLS		●	●	●	●
File System		●	●	●	●
Audio Record/Play		o	o	o	o
TTS		o	o	o	o
DTMF		o	o	o	o
LBS		●	●	●	●
FOTA		●	●	●	●
Jamming Detection		●	●	●	●
Android RIL		Android 5.0/6.0/7.0/8.0/9.0	Android 5.0/6.0/7.0/8.0/9.0	Android 5.0/6.0/7.0/8.0/9.0	Android 5.0/6.0/7.0/8.0/9.0
USB Driver		Microsoft Windows 7/8/10 Linux/Android	Microsoft Windows 7/8/10 Linux/Android	Microsoft Windows 7/8/10 Linux/Android	Microsoft Windows 7/8/10 Linux/Android
WWAN (RNDIS)		●	●	●	●
ECM		●	●	●	●
MBIM		Win8/Win10	Win8/Win10	Win8/Win10	Win8/Win10
NDIS		Linux/Windows 7/8/10	Linux/Windows 7/8/10	Linux/Windows 7/8/10	Linux/Windows 7/8/10
Open Linux		o	o	o	o
Firmware Upgrade		USB/FOTA	USB/FOTA	USB/FOTA	USB/FOTA
Interfaces					
SIM Card		1.8V/3.0V	1.8V/3.0V	1.8V/3.0V	1.8V/3.0V
UART		●	●	●	●
USB		●	●	●	●
PCM		o	o	o	o
Analog Audio		o	o	o	o
Embedded SIM card socket		o	o	o	o
Diversity Receiver		●	●	●	●
Certification					
Regulatory		FCC/PTCRB/IC/RoHS/ REACH	FCC/GCF/RoHS/REACH	CE-RED/ACMA/FCC/NCC/ RoHS/REACH/Anatel	Telec/JATE/RoHS/REACH
Carrier		AT&T	Verizon		Docomo/Softbank

●: support o: optional *: on going

Product		SIM7600E-H-PCIE	SIM7600E-H1C-PCIE	SIM7600NA-H-PCIE	SIM7600G-H-PCIE
Form Factor		Mini PCIE	Mini PCIE	Mini PCIE	Mini PCIE
Dimensions(mm)		50.8*31*5.35	50.8*31*5.35	50.8*31*5.35	50.8*31*5.35
Frequency Bands	LTE-FDD	B1/B3/B5/B7/B8/B20	B1/B3/B5/B7/B8/B20	B2/B4/B5/B12/B13/B14/B25/B26/B66/B71	B1/B2/B3/B4/B5/B7/B8/B12/B13/B18/B19/B20/B25/B26/B28/B66
	LTE-TDD	B38/B40/B41	B38/B40/B41	B41	B34/B38/B39/B40/B41
	WCDMA	B1/B5/B8	B1/B5/B8		B1/B2/B4/B5/B6/B8/B19
	GSM	900/1800MHz	900/1800MHz		850/900/1800/1900MHz
GNSS		o	o	o	o
Temperature		-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C
Electrical Features					
Supply Voltage(V)		3.0~ 3.6	3.0~ 3.6	3.0~ 3.6	3.0~ 3.6
Power Consumption (mA)	LTE	2.3	2.3	2.3	2.3
	WCDMA, DRX=9	3.3	3.3		3.3
	GSM,BS_PA_MFRMS=2	2.8	2.8		2.8
Data Transfer					
LTE(Mbps)		150(DL)/50(UL)	150(DL)/50(UL)	150(DL)/50(UL)	150(DL)/50(UL)
HSPA+(Mbps)		42(DL)/5.76(UL)	42(DL)/5.76(UL)		42(DL)/5.76(UL)
WCDMA(Kbps)		384(DL)/384(UL)	384(DL)/384(UL)		384(DL)/384(UL)
GPRS/EDGE(Kbps)		236.8(DL)/236.8(UL)	236.8(DL)/236.8(UL)		236.8(DL)/236.8(UL)
Software Features					
Protocol		TCP/IP/IPV4/IPV6/ Multi-PDP/FTP/FTPS/ HTTP/ HTTPS/DNS	TCP/IP/IPV4/IPV6/ Multi-PDP/FTP/FTPS/HTTP/ HTTPS/DNS	TCP/IP/IPV4/IPV6/ Multi-PDP/FTP/FTPS/HTTP/ HTTPS/DNS	TCP/IP/IPV4/IPV6/ Multi-PDP/FTP/FTPS/HTTP/ HTTPS/DNS
TLS		●	●	●	●
File System		●	●	●	●
Audio Record/Play		o	o	o	o
TTS		o	o	o	o
DTMF		o	o	o	o
LBS		●	●	●	●
FOTA		●	●	●	●
Jamming Detection		●	●	●	●
Android RIL		Android 5.0/6.0/7.0/8.0/9.0	Android 5.0/6.0/7.0/8.0/9.0	Android 5.0/6.0/7.0/8.0/9.0	Android 5.0/6.0/7.0/8.0/9.0
USB Driver		Microsoft Windows 7/8/10 Linux/Android	Microsoft Windows 7/8/10 Linux/Android	Microsoft Windows 7/8/10 Linux/Android	Microsoft Windows 7/8/10 Linux/Android
WWAN (RNDIS)		●	●	●	●
ECM		●	●	●	●
MBIM		Win8/Win10	Win8/Win10	Win8/Win10	Win8/Win10
NDIS		Linux/Windows 7/8/10	Linux/Windows 7/8/10	Linux/Windows 7/8/10	Linux/Windows 7/8/10
Open Linux		o		o	o
Firmware Upgrade		USB/FOTA	USB	USB/FOTA	USB/FOTA
Interfaces					
SIM Card		1.8V/3.0V	1.8V/3.0V	1.8V/3.0V	1.8V/3.0V
UART		●	●	●	●
USB		●	●	●	●
PCM		o	o	o	o
Analog Audio		o	o	o	o
Embedded SIM card socket		o	o	o	o
Diversity Receiver		●	o	●	●
Certification					
Regulatory		CE-RED/RoHS/REACH/ IMDA/GCF	CE-RED/RoHS/REACH	FCC/IC/PTCRB/GCF/ RoHS/REACH	CE-RED/FCC/IC/RCM/CCC/ SRRC/Telec/Jate/Anatel/NCC/ IMDA/KC/ICASA/UKCA/PTCRB/ GCF/RoHS/REACH
Carrier		DEUTSCHE TELEKOM /Vodafone		AT&T/Verizon/US Cellular/ T-mobile	AT&T/Verizon/T-mobile/US Cellular/DEUTSCHE TELEKOM /Telstra/Orange

●: support o: optional *: on going